

QT-Brightek Chip LED Series

SMD 1210 Bi-Color LED with Inner Lens

Part No.: QBLP651-O1YG

Table of Contents:

Introduction	3
Electrical / Optical Characteristic (Ta=25 °C)	4
Absolute Maximum Rating	4
Characteristic Curves.....	6
Solder Profile & Footprint:.....	8
Ordering Information	9
Revision History	10
Disclaimer	10

Product: QBLP651-O1YG	Date: January 17, 2021	Page 2 of 10
	Version# 1.0	

Introduction

Feature:

- Water clear lens
- 1210 LED package with inner lens
- GaAsP technology for Orange
- GaP technology for Yellow Green
- Viewing Angle: 40° typ.

Description:

These ultra bright 1210 LEDs have a height profile of 1.5mm. Combination of high brightness output and small footprint, these LEDs are ideal for keypad backlighting and status indication.

Application:





- Status indication
- Back lighting application

Certification & Compliance:

- TS16949
- ISO9001
- RoHS Compliant



Dimension:

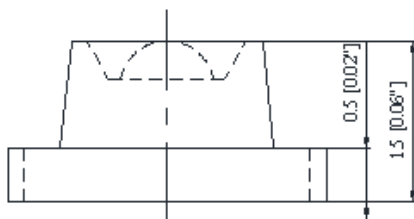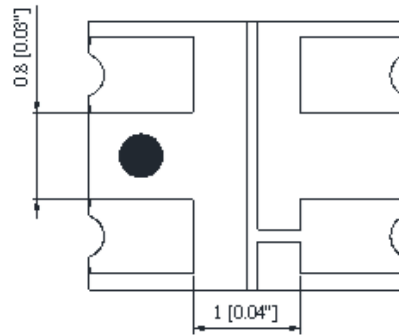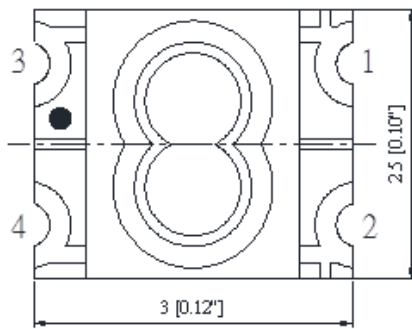

Units: mm / tolerance = +/-0.15mm

Electrical / Optical Characteristic (Ta=25 °C)

Product	Color	I _F (mA)	V _F (V)		λ _D (nm)			I _V (mcd)	
			Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.
QBLP651-O1YG	Orange	20	2.1	2.5	600	605	610	20	35
	Yellow Green	20	2.1	2.5	565	570	576	25	45

Absolute Maximum Rating

Material	P _d (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	T _{SO L} (°C)**
GaAsP	75	30	125	5	-40 ~ +80	-40 ~ +85	260
GaP	75	30	125	5	-40 ~ +80	-40 ~ +85	260

*Duty 1/8 @ 1kHz

**IR Reflow for no more than 10 sec @ 260 °C

Luminous Intensity I_V for Yellow Green @ $I_F=20\text{mA}$

Bin	Min.	Max.	Unit
D	25	32	mcd
E	32	40	
F	40	50	
G	50	63	
H	63	80	

Luminous Intensity I_V for Orange @ $I_F=20\text{mA}$

Bin	Min.	Max.	Unit
C	20	25	mcd
D	25	32	
E	32	40	
F	40	50	
G	50	63	

Dominant Wavelength λ_D for Yellow Green @ $I_F=20\text{mA}$


Bin	Min.	Max.	Unit
h	565	568	nm
i	568	572	
j	572	576	

Dominant Wavelength λ_D for Orange @ $I_F=20\text{mA}$



Bin	Min.	Max.	Unit
p	600	605	nm
q	605	610	

Characteristic Curves



GaAsP (Orange)

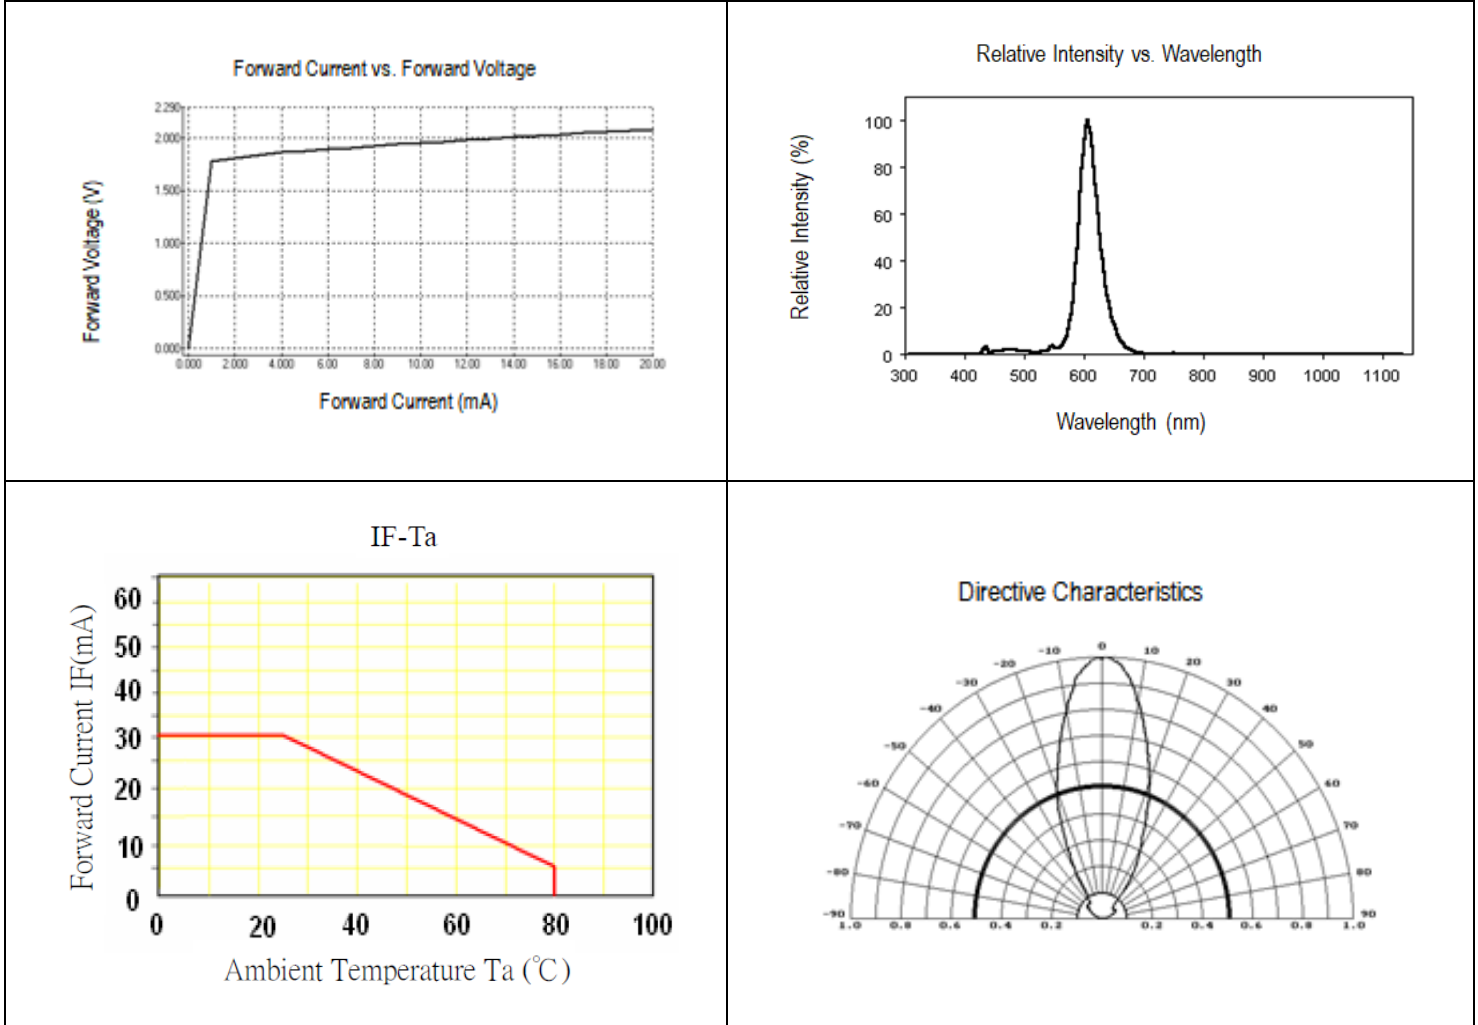


GaP (Yellow Green)

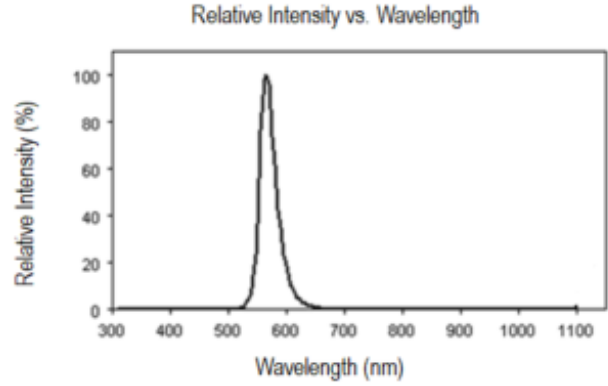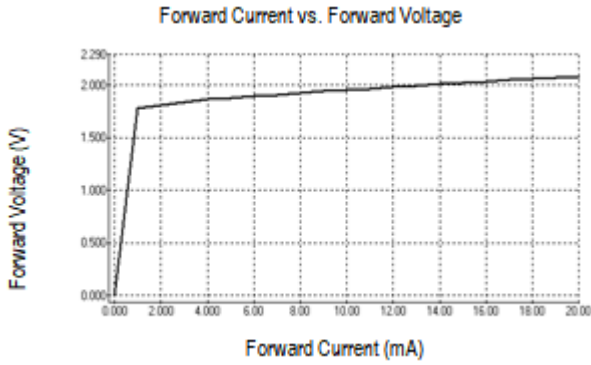


IF-Ta

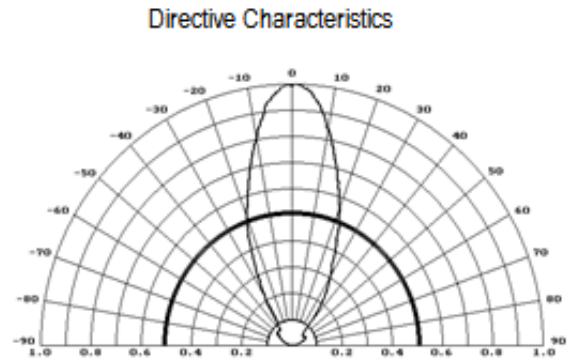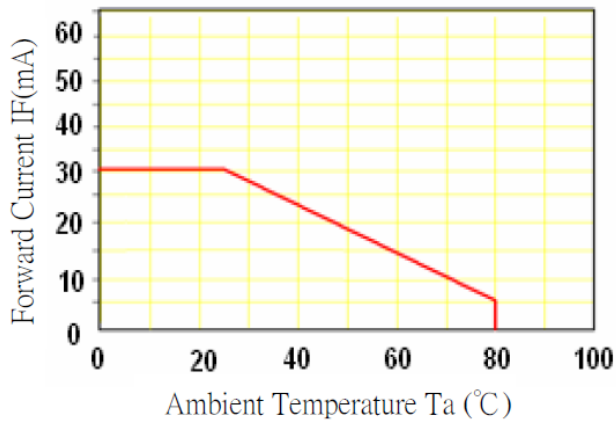

Solder Profile & Footprint:

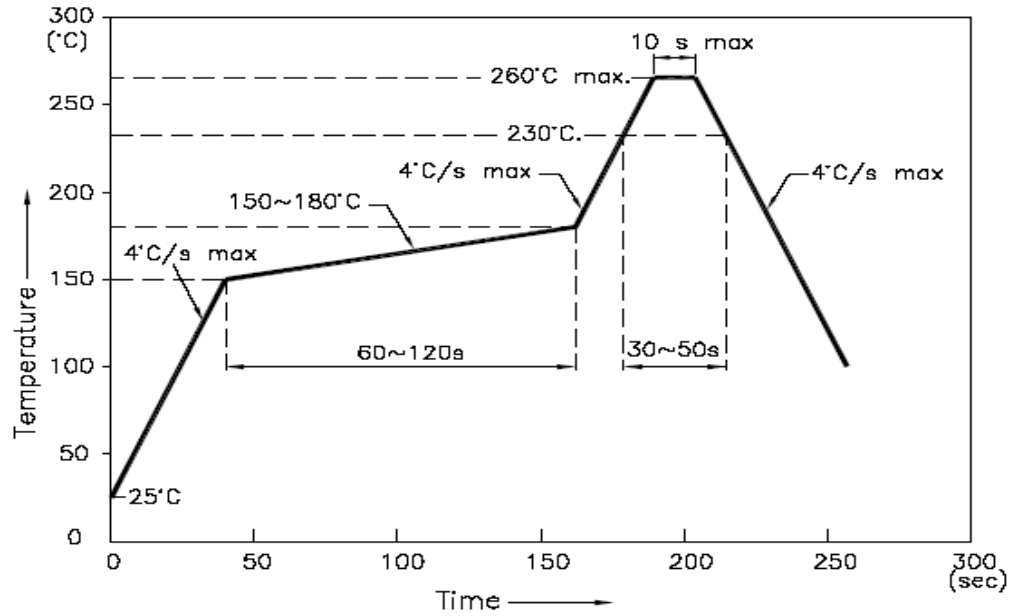

Recommended Pad Layout

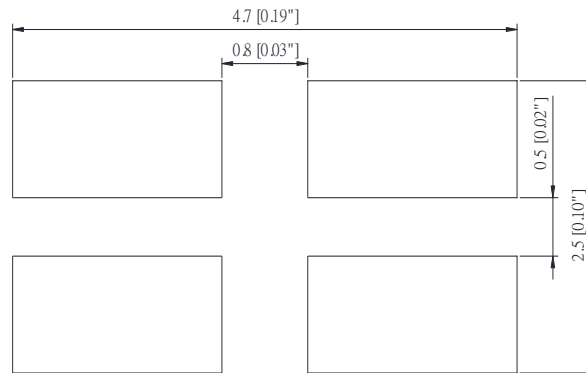

Units: mm

Tolerance: ± 0.15mm

Product: QBLP651-O1YG	Date: January 17, 2021	Page 8 of 10
	Version# 1.0	



Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per reel
QBLP651-O1YG	QBLP651-O1YG	Orange (O1): $I_v=35\text{mcd typ. @ } I_F=20\text{mA}$, $\lambda_D=600\text{nm to } 610\text{nm}$	3000 Units
		Yellow Green (YG): $I_v=45\text{mcd typ. @ } I_F=20\text{mA}$, $\lambda_D=565\text{nm to } 576\text{nm}$	



Revision History

Description:	Revision #	Revision Date
New Release of QBLP651-O1YG	V1.0	01/17/2021

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Product: QBLP651-O1YG	Date: January 17, 2021	Page 10 of 10
	Version# 1.0	