

QT-Brightek High Power Series

1.0 W High Power LED

Part No.: QBHP684-RGBBU

B: 120° Viewing Angle
U = 350mA

Table of Contents:

Introduction	3
Electrical / Optical Characteristic ($T_A=25^{\circ}\text{C}$)	4
Absolute Maximum Rating	4
Characteristic Curves.....	5
IR Reflow Soldering Profile	6
Packing	7
Labeling	8
Ordering Information	8
Revision History	9
Disclaimer	9

Introduction

Feature:

- 1W High Power RGB LED
- Thermal Resistance Rth (Junction / Solder Point): 20 ° C/W typ.
- Packed in tape and reel
- Viewing Angle: 120° typ.

Description:

This 1W high bright high power LED has compact size of 3.45 x 3.45mm. It is ideal for both indoor and outdoor lighting

Application:


- Architectural and outdoor lighting
- Household appliances
- General lighting

Certification & Compliance:

- ISO9001
- RoHS Compliant



Dimensions:

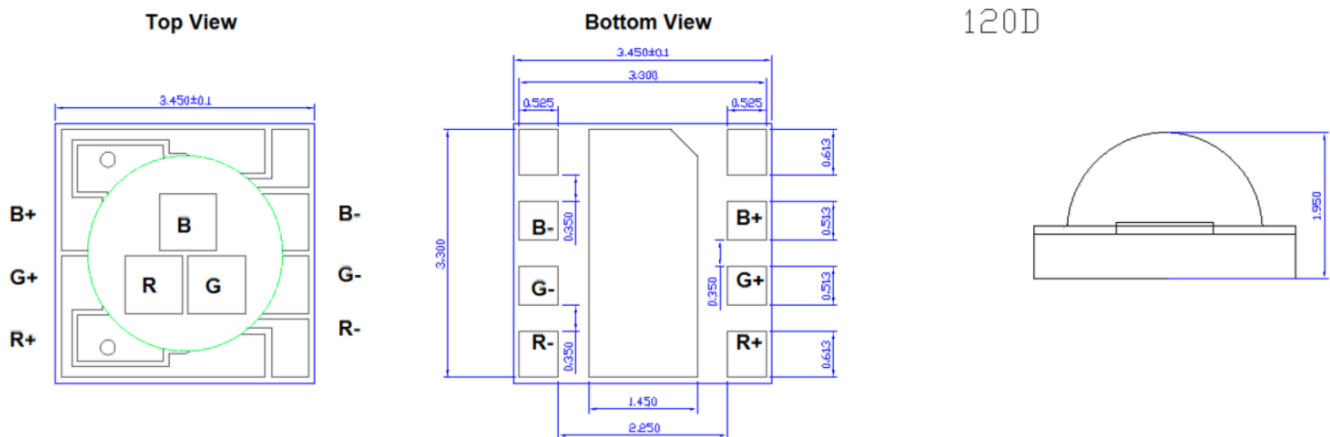

Units: mm / tolerance = +/-0.2mm

Electrical / Optical Characteristic ($T_A=25^\circ\text{C}$)

Product Number	Color	I_F (mA)	V_F (V)			λ_D (nm)			Φ_v (lm)	
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.
QBHP684-RGBBU	Red	350	1.8	2.4	2.8	620	630	635	30	35
	Green	350	2.8	3.2	3.6	515	520	530	70	75
	Blue	350	2.8	3.2	3.6	450	460	465	10	15

Absolute Maximum Rating



Material	P_d (W)	I_F (mA)	I_{FP} (mA)*	V_R (V)	T_{OP} ($^\circ\text{C}$)	T_{ST} ($^\circ\text{C}$)	T_{SOL} ($^\circ\text{C}$)**
InGaN	2.38	350	500	5	-40 to +85	-40 to +100	260

*Duty 1/10 @ 0.01s Pulse Width



**IR Reflow for no more than 10 sec @ 260 $^\circ\text{C}$

Characteristic Curves

Forward Current vs. Forward Voltage (Ta=25°C)

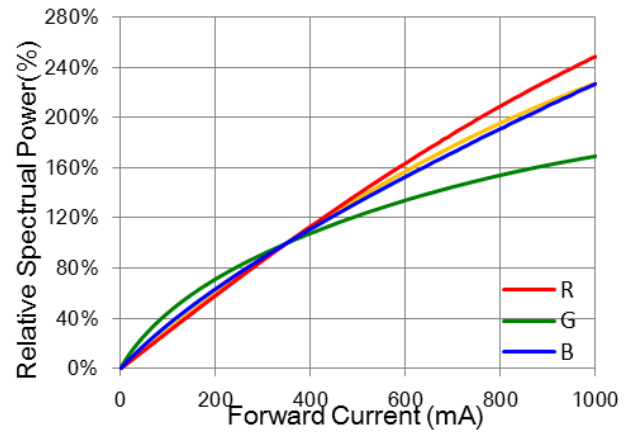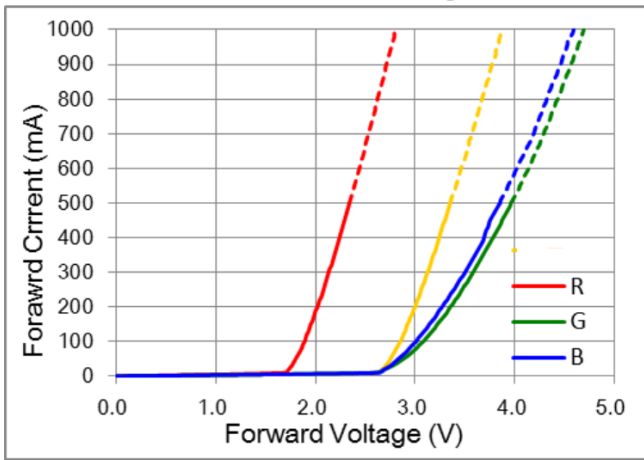


Spectrum Distribution

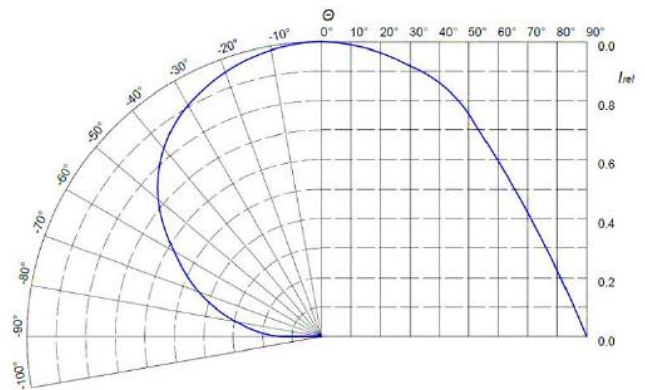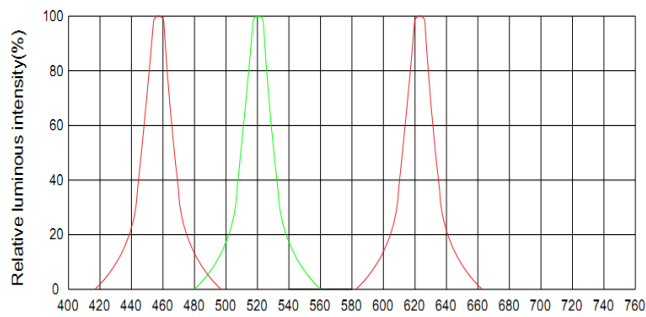


IR Reflow Soldering Profile


Lead Free solder

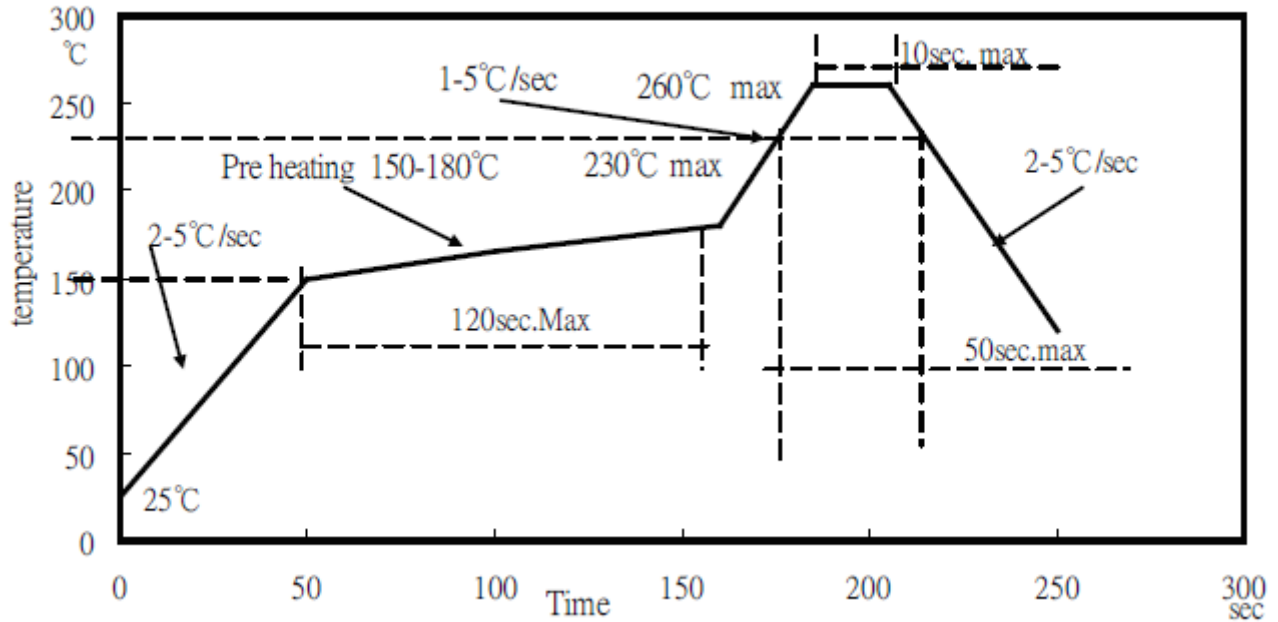

Recommended Soldering Pad:

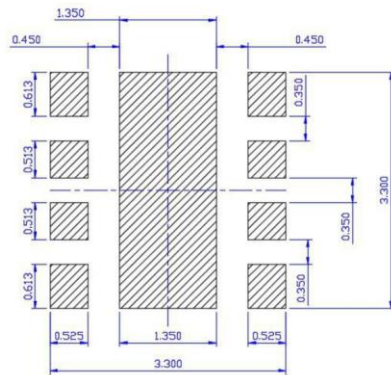

RECOMMENDED PCB SOLDER PAD

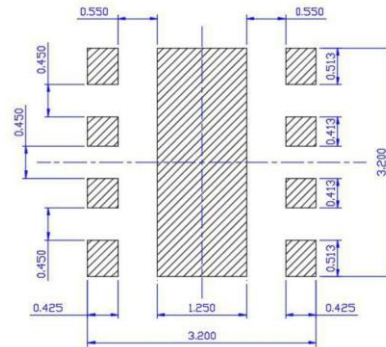


RECOMMENDED STENCIL PATTERN
(HATCHED AREA IS OPENING)

Unit: mm

Packing

Tape and Reel:

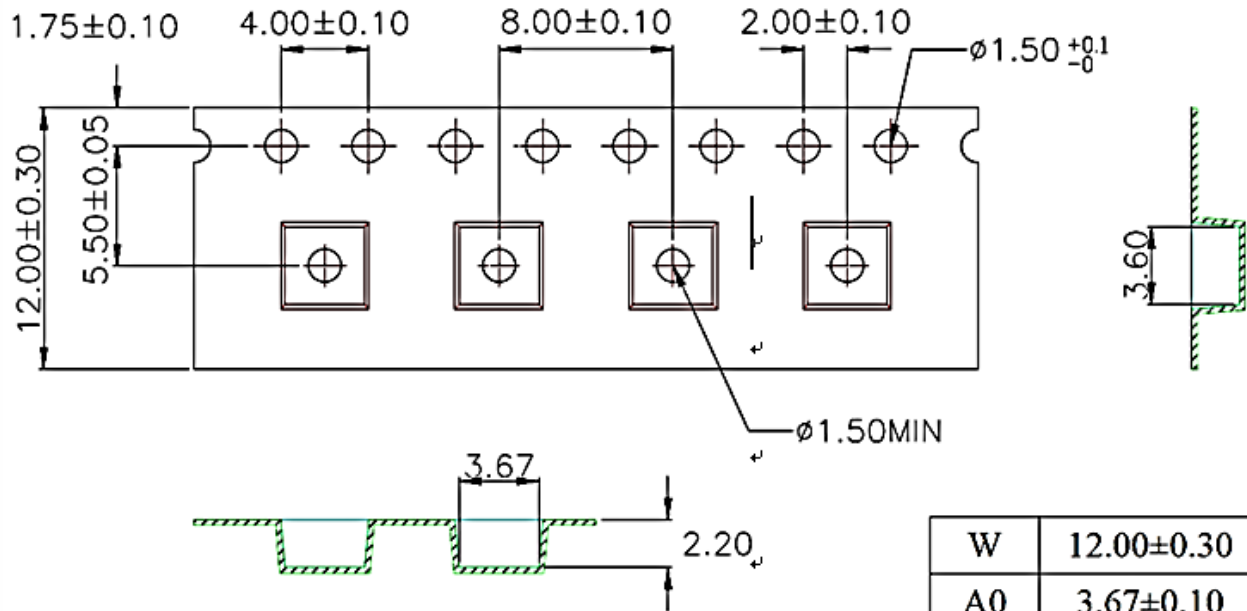

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-D requirements.
5. Thickness : 0.30 ± 0.05 mm.

Unit: mm

W	12.00±0.30
A0	3.67±0.10
B0	3.60±0.10
K0	2.20±0.10

Labeling

Part No: _____

Customer P/N: _____

Item: _____

Q'ty: _____

Vf: _____

Iv: _____

WI: _____

Date: _____

Made in Taiwan**Ordering Information**

Part #	Orderable Part #	Spec Range	Quantity per reel
QBHP684-RGBBU	QBHP684-RGBBU	---	500 units

Revision History

Description:	Revision #	Revision Date
New Release of QBHP684-RGBBU	V1.0	03/29/2021

Disclaimer

QT-BRIGHTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.