

**QT-Brightek PLCC Series**

**0606 PLCC4 RGB LED**

**Part No.: QBLP1515A-RGB2A**

**A: Common Anode  
RGB2: Diffused Lens  
A: 10mA**

Product: QBLP1515A-RGB2A	Date: December 16, 2025	Page 1 of 10
	Version# 1.0	



**Table of Contents:**

Introduction ..... 3

Electrical / Optical Characteristic (T<sub>A</sub>=25 °C)..... 4

Absolute Maximum Rating ..... 4

Solder Profile & Footprint..... 7

Packing ..... 8

Ordering Information ..... 9

Revision History ..... 10

Disclaimer ..... 10

## Introduction

### Feature:

- White diffused lens
- 0606 (1.55 x 1.5mm) PLCC-4 pkg
- RGB LED
- Common anode
- Beam angle: 120 deg typ.
- Silicone lens
- MSL 2A
- Height profile: 1mm

### Application:



- Status indication
- Back lighting application
- Display signage board

### Certification & Compliance:

- ISO9001
- RoHS Compliant



### Dimension:

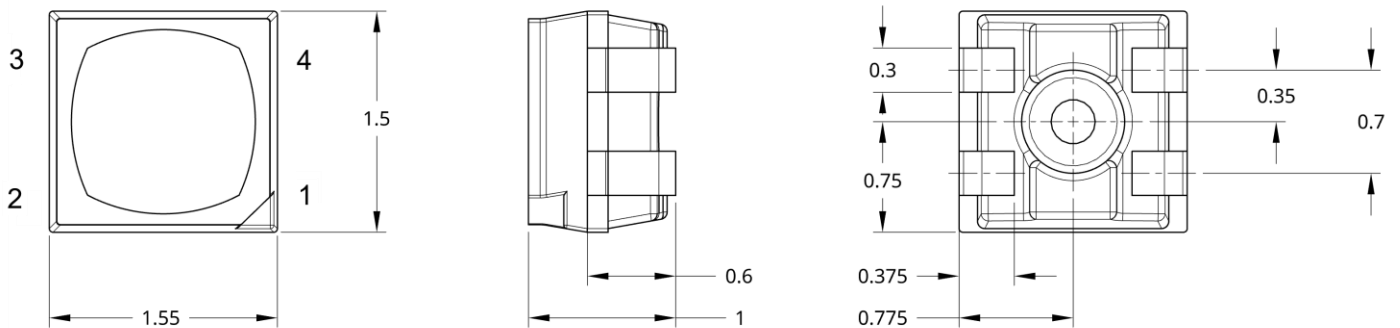

Pin 1: Common Anode  
 Pin 2: Cathode Blue  
 Pin 3: Cathode Green  
 Pin 4: Cathode Red

Units: mm / tolerance = +/-0.2mm

## Electrical / Optical Characteristic (T<sub>A</sub>=25 °C)

Product	Color	I <sub>F</sub> (mA)	V <sub>F</sub> (V)		λ <sub>D</sub> (nm)			λ <sub>P</sub> (nm)	I <sub>V</sub> (mcd)		
			Typ.	Max.	Min.	Typ.	Max.	Typ.	Min.	Typ.	Max.
QBLP1515A- RGB2A	Red	10	2.0	2.4	615	622	630	630	220	360	490
	Green	10	2.8	3.3	520	528	535	621	640	900	1800
	Blue	10	2.8	3.3	460	468	475	463	130	210	380

## Absolute Maximum Rating

Chip Material	P <sub>d</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)*	V <sub>R</sub> (V)	T <sub>OP</sub> (°C)	T <sub>ST</sub> (°C)	T <sub>J</sub> (°C)	T <sub>SO L</sub> (°C)**
AllnGaP (R)	46	20	100	5	-40 to +85	-40 to +100	115	260
InGaN (G/B)	60	20	100	5	-40 to +85	-40 to +100	115	260

\*Pulse width ≤ 0.1 msec, duty ≤ 1/10

\*\*IR Reflow for no more than 10 sec @ 260 °C

### Forward Voltage V<sub>F</sub> for Red @ I<sub>F</sub>=10mA

Bin	Min.	Max.	Unit
V1B	1.5	1.8	V
V1C	1.8	2.1	
V2A	2.1	2.4	

### Forward Voltage V<sub>F</sub> for Green & Blue @ I<sub>F</sub>=10mA

Bin	Min.	Max.	Unit
V2B	2.4	2.7	V
V2C	2.7	3.0	
V3A	3.0	3.3	

### Luminous Intensity I<sub>V</sub> for Red @ I<sub>F</sub>=10mA

Bin	Min.	Max.	Unit
22	220	290	mcd
23	290	380	
24	380	490	

### Luminous Intensity I<sub>V</sub> for True Green @ I<sub>F</sub>=10mA

Bin	Min.	Max.	Unit
26	640	830	mcd
27	830	1080	
28	1080	1400	
29	1400	1800	

### Luminous Intensity I<sub>V</sub> for Blue @ I<sub>F</sub>=10mA

Bin	Min.	Max.	Unit
20	130	170	mcd
21	170	220	
22	220	290	
23	290	380	



**Dominant Wavelength  $\lambda_D$  for Red @  $I_F=10mA$**

Bin	Min.	Max.	Unit
A5	615	620	nm
R1	620	625	
R2	625	630	


**Dominant Wavelength  $\lambda_D$  for Green @  $I_F=10mA$**

Bin	Min.	Max.	Unit
TG2	520	525	nm
TG3	525	530	
TG4	530	535	


**Dominant Wavelength  $\lambda_D$  for Blue @  $I_F=10mA$**

Bin	Min.	Max.	Unit
B5	460	465	nm
B6	465	470	
B7	470	475	


## Characteristic Curves

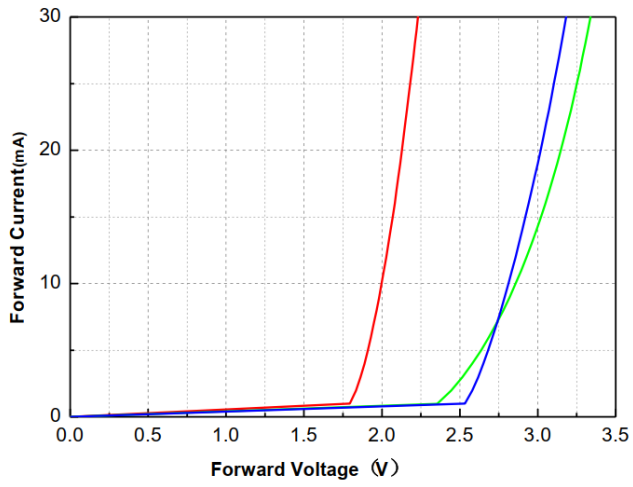


Forward Current VS. Forward Voltage

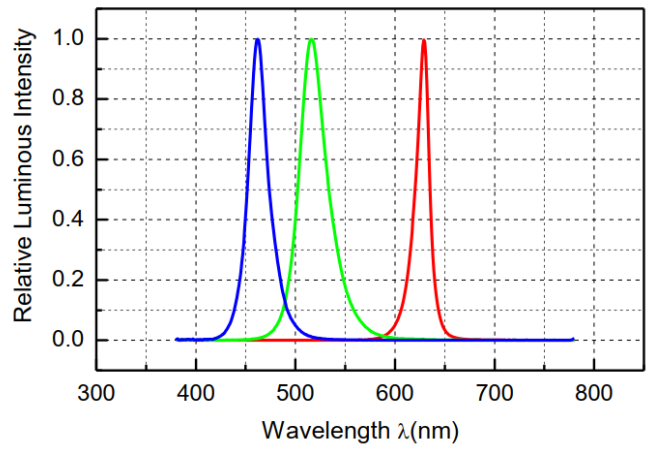

Spectral Power Distribution vs. Wavelength

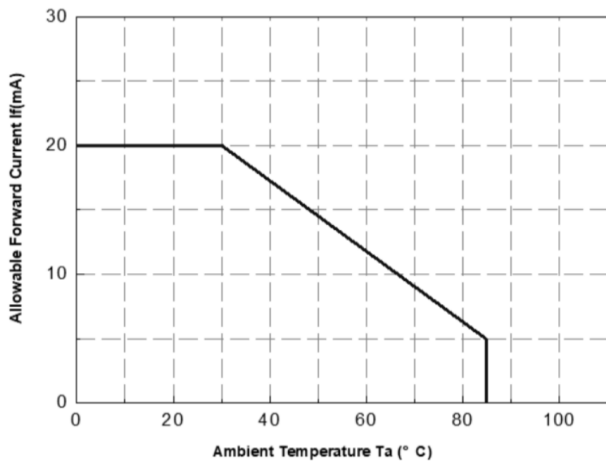


Forward Current vs. Ambient Temperature

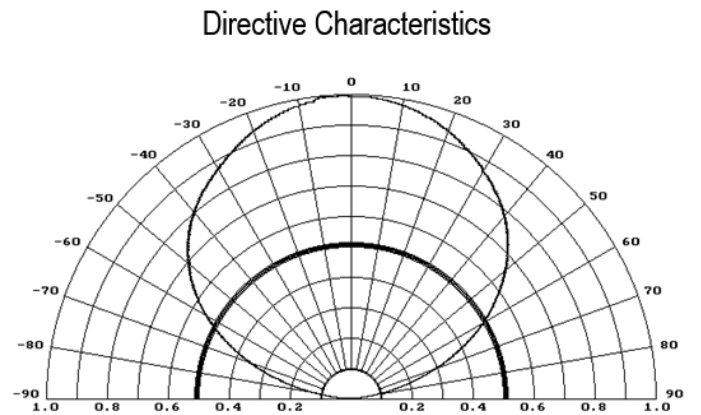

Directive Characteristics


## Solder Profile & Footprint

-The recommended lead free reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

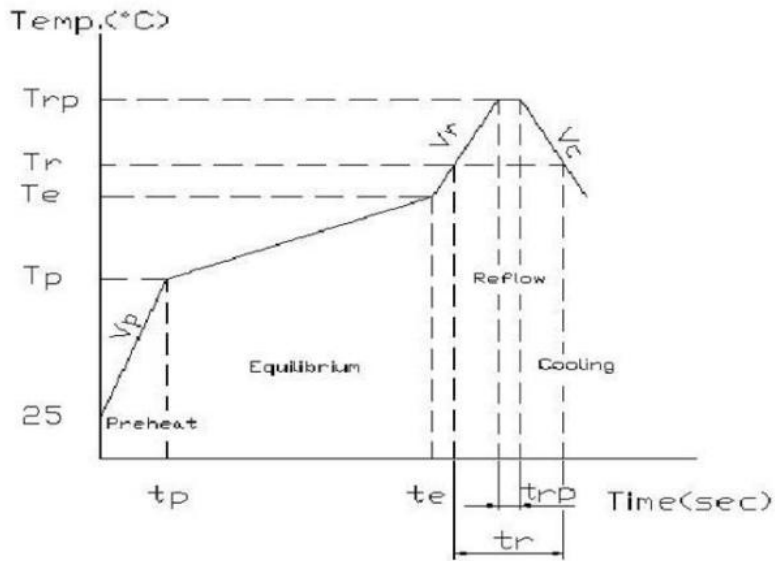

(1)Preheat	Ramp-up rate	Vp	1	5	°C/sec
	temperature	Tp	150	-	°C
	time	tp	-	-	sec
(2)Equilibrium	Ramp-up rate	Ve	-	-	°C/sec
	temperature	Te	150	200	°C
	Time	te	60	120	sec
(3)Reflow	Ramp-up rate	Vr	1	5	°C/sec
	temperature	Tr	220	-	°C
	Time	tr	-	60	sec
	Peak temperature	Trp	-	260	°C
	Peak time	trp	-	10	sec
(4)Cooling	Ramp-down rate	Vc	3	6	°C/sec


### Recommended Solder Pad

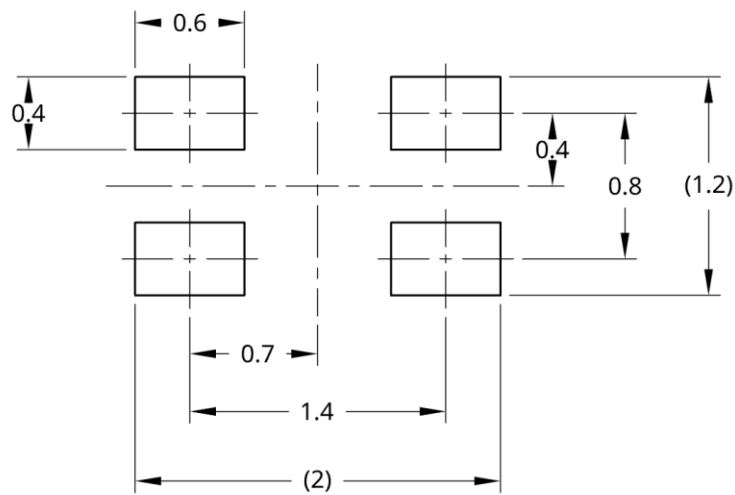

Units: mm


## Packing

### Reel Dimension:

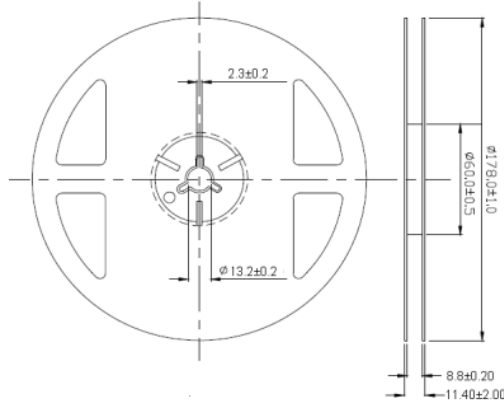

Unit: mm


### Tape Dimension:

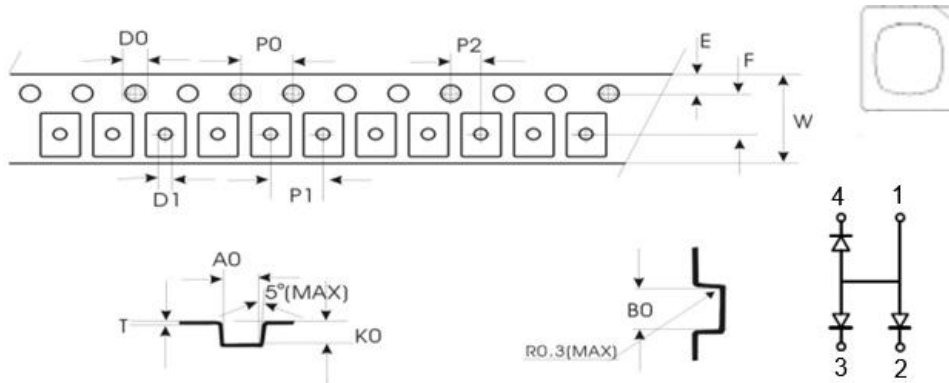

A0	B0	K0	P0	P1	P2
1.8±0.1	1.85±0.1	1.2±0.1	4.0±0.1	4.0±0.1	2.00±0.1
E	F	D0	D1	W	T
1.75±0.10	3.50±0.05	1.5±0.1	1.0±0.1	8.0±0.1	0.25±0.05

Unit: mm

### Packaging Specification:

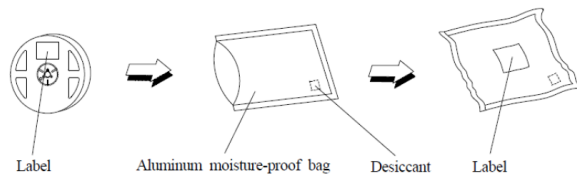

## Labeling



Part No: \_\_\_\_\_

Customer P/N: \_\_\_\_\_

Item: \_\_\_\_\_

Q'ty: \_\_\_\_\_

Vf: \_\_\_\_\_

Iv: \_\_\_\_\_

WI: \_\_\_\_\_

Date: \_\_\_\_\_

**Made in China**

## Ordering Information

Orderable Part #	Spec Range	Quantity per reel
QBLP1515A-RGB2A	A single reel of LEDs will contain only one brightness bin, one color bin, and one forward voltage bin for each color. Shipments may contain any of the bin ranges listed on page 4 & 5. The specific bin groupings or combinations included in each shipment cannot be predetermined or guaranteed.	3,500 units



## Revision History

Description:	Revision #	Revision Date
New Release of QBLP1515A-RGB2A	V1.0	12/16/2025

## Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Product: QBLP1515A-RGB2A	Date: December 16, 2025	Page 10 of 10
	Version# 1.0	