

QT-Brightek Chip LED Series
1206 Chip LED with Inner Lens

Part No.: QBLP651-S3

S3: S3: $\lambda_p=660\text{nm}$ ($\lambda_D=640\text{nm}$)

Product: QBLP651-S3	Date: November 1, 2023	Page 1 of 9
	Version# 1.0	

Table of Contents:

Introduction	3
Electrical / Optical Characteristic (Ta=25 °C)	4
Absolute Maximum Rating	4
Characteristic Curves.....	5
Solder Profile	6
Labeling	8
Ordering Information	8
Revision History	9
Disclaimer	9

Introduction

Feature:

- Water clear lens
- Tape and reel packaging
- Bright LED package
- AllnGaP technology
- Viewing Angle: 40° typ.

Description:

These 1206 LEDs have a height profile of 1.40mm. With a combination of high brightness output and a small footprint, these LEDs are ideal for status indication.

Application:


- Status indication
- Back lighting application

Certification & Compliance:

- ISO9001
- RoHS Compliant



Dimension:

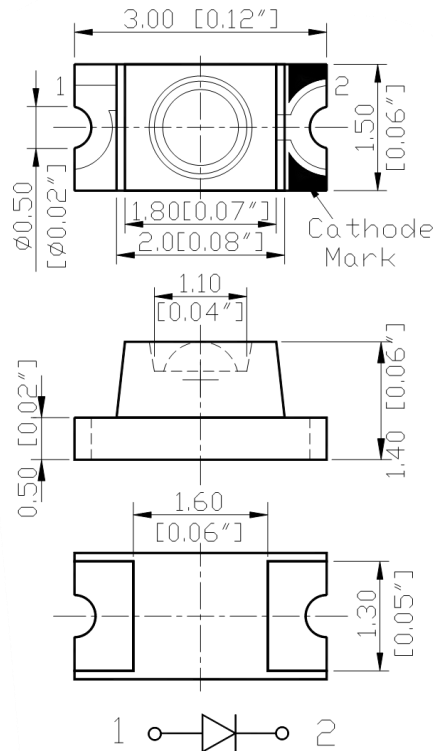

Units: mm / tolerance = +/-0.1mm

Electrical / Optical Characteristic (Ta=25 °C)

Product Number	Color	I _F (mA)	V _F (V)			λ _P (nm)			λ _D (nm)	I _V (mcd)	
			Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	Min.	Typ.
QBLP651-S3	Deep Red	20	1.7	2.0	2.5	650	660	670	640	55	90

Absolute Maximum Rating

Material	P _d (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	T _{SOL} (°C)**
AllnGaP	75	30	125	5	-40 to +80	-40 to +85	260

*Duty 1/8 @ 1KHz

**IR Reflow for no more than 10 sec @ 260 °C

Forward Voltage V_F @ I_F=20mA

Bin	Min.	Max.	Unit
□	1.7	2.5	V

Luminous Intensity I_V @ I_F=20mA


Bin	Min.	Max.	Unit
G1	55	70	mcd
H1	70	89	
I2	89	112	
J1	112	140	
K1	140	175	

Dominant Wavelength λ_P @ I_F=20mA


Bin	Min.	Max.	Unit
X	650	660	nm
Y	660	670	

Characteristic Curves


Relative Intensity vs. Wavelength

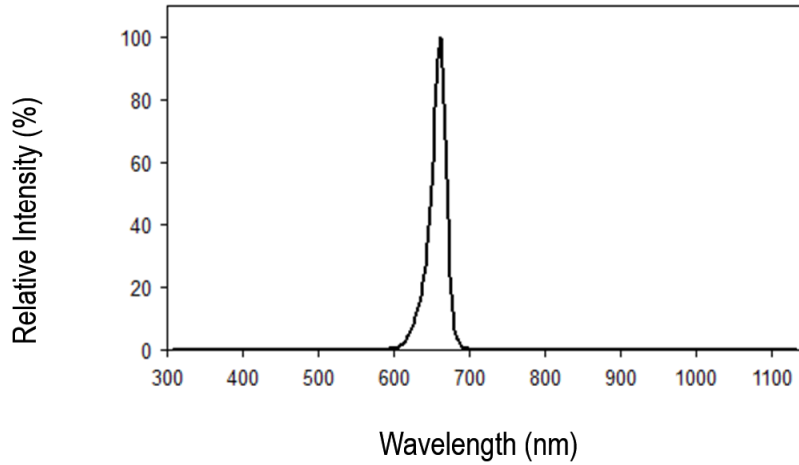

Forward Current vs. Forward Voltage

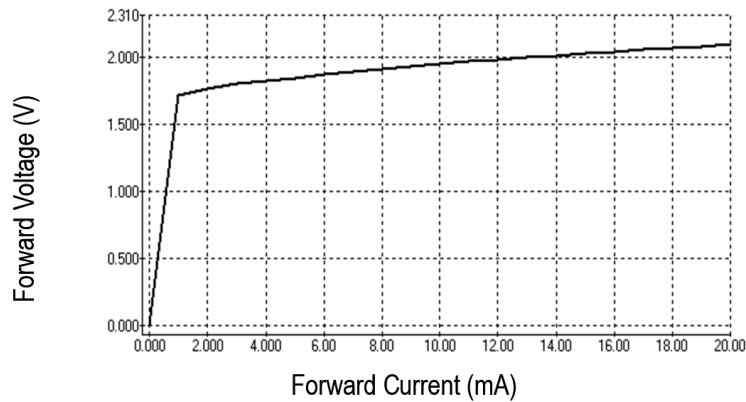


Directive Characteristics

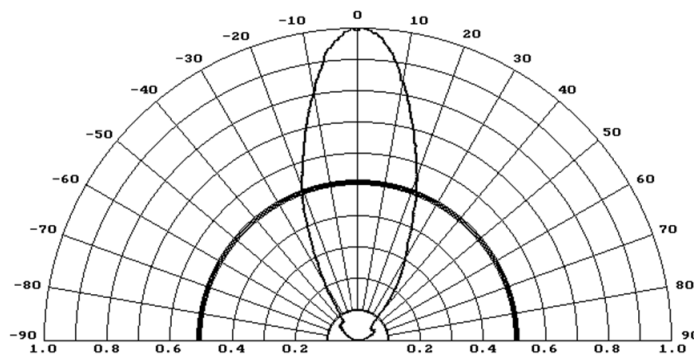


Solder Profile

-The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

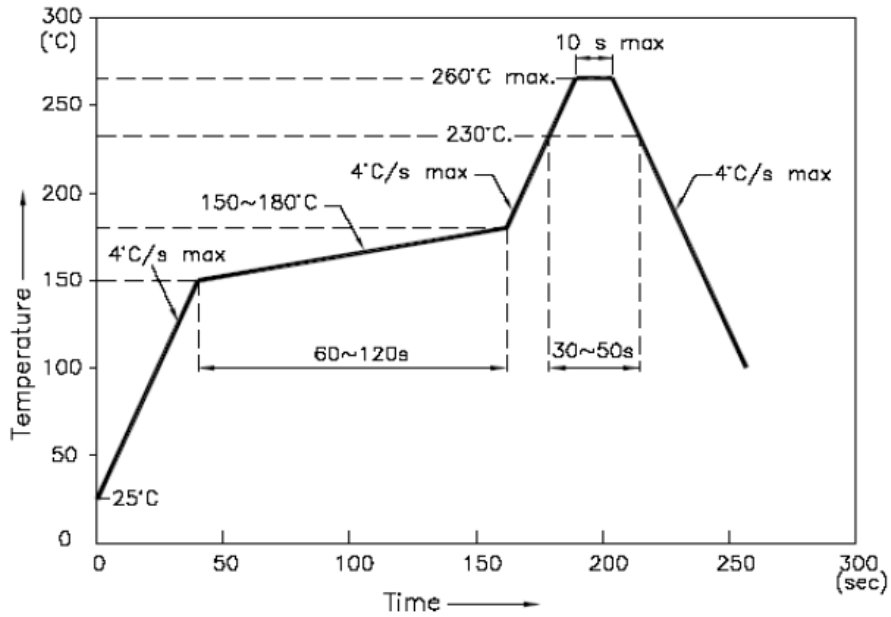


Recommended Pad Layout

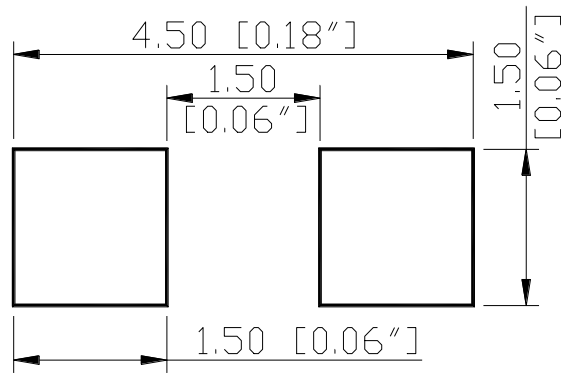

Units: mm


Packing

Reel Dimensions:

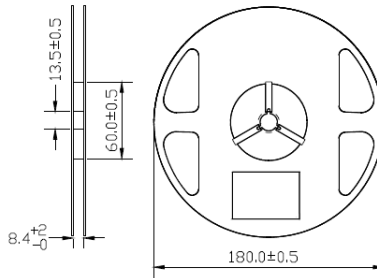


Unit: mm

Tape Dimensions:

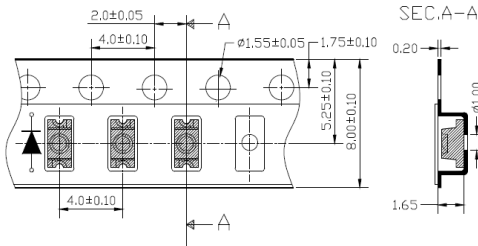


Unit: mm

Arrangement of Tape:

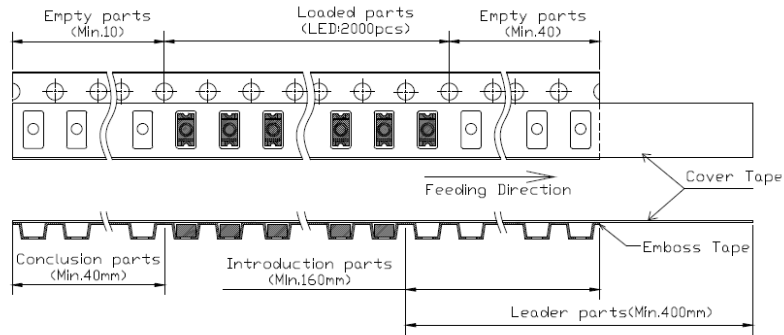

Packing specifications:

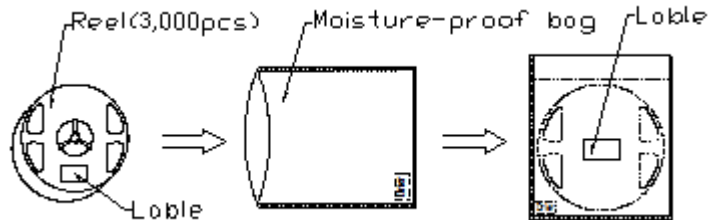

Labeling



Part No: _____
Customer P/N: _____
Item: _____
Q'ty: _____
Vf: _____
Iv: _____
WI: _____
Date: _____

Made in China

Ordering Information

Orderable Part #	Spec Range	Quantity per reel
QBLP651-S3	$I_V=90\text{mcd typ. @ } I_F=20\text{mA, } \lambda_P=650 \text{ to } 670\text{nm}$	3,000 pcs

Revision History

Description:	Revision #	Revision Date
New Release of QBLP651-S3	V1.0	11/01/2023

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.