

# **QT-Brightek Chip LED Series**

## **SMD 0603 LED**

**Part No.: QBLP601-IW5-2897**

**5: 5mA**

**2897: High Brightness Version**

---

**Table of Contents:**

Introduction .....	3
Electrical / Optical Characteristic (Ta=25 °C) .....	4
Absolute Maximum Rating .....	4
CIE Chromaticity Diagram.....	5
Solder Profile & Footprint.....	7
Packing .....	8
Ordering Information .....	9
Revision History .....	10
Disclaimer .....	10

## Introduction

**Feature:**

- Yellow diffused lens
- Package in tape and reel
- Ultra bright 0603 LED package
- InGaN technology
- Viewing angle: 140° typ.

**Description:**

These ultra bright 0603 LEDs have a height profile of 0.60mm. Combination of high brightness output and small footprint, these LEDs are ideal for keypad backlighting and status indication.

**Application:**


- Status indication
- Back lighting application

**Certification & Compliance:**

- ISO9001
- RoHS Compliant



**Dimension:**

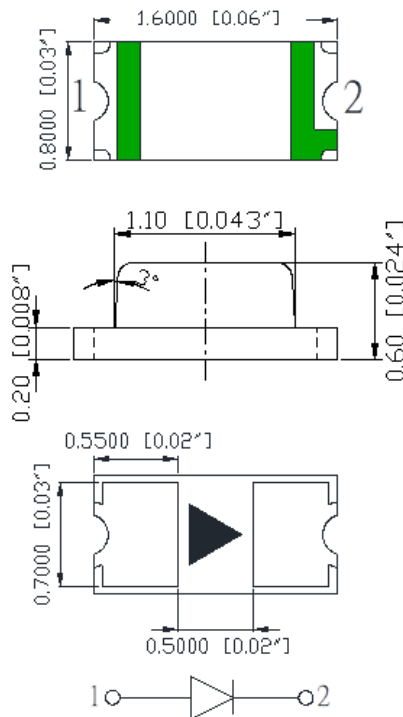

Units: mm / tolerance = +/-0.1mm

### Electrical / Optical Characteristic (Ta=25 °C)

Product	Color	I <sub>F</sub> (mA)	V <sub>F</sub> (V)			CIE Coordinate	I <sub>V</sub> (mcd)		
			Min.	Typ.	Max.	Typ.	Min.	Typ.	Max.
QBLP601-IW5-2897	White	5	2.5	2.8	3.1	X=0.3002 Y=0.305	100	190	320

### Absolute Maximum Rating

Material	P <sub>d</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)*	V <sub>R</sub> (V)	T <sub>OP</sub> (°C)	T <sub>ST</sub> (°C)	T <sub>SOL</sub> (°C)**
InGaN	93	30	125	5	-40 ~ +80	-40 ~ +85	260

\*Duty 1/8 @ 1kHz

\*\*IR Reflow for no more than 10 sec @ 260 °C


### Forward Voltage V<sub>F</sub> @ I<sub>F</sub>=5mA

Bin	Min.	Max.	Unit
e	2.5	2.8	V
f	2.8	3.1	

### Luminous Intensity I<sub>V</sub> @ I<sub>F</sub>=5mA



Bin	Min.	Max.	Unit
J	100	125	mcd
K	125	160	
L	160	200	
M	200	250	
N	250	320	

**CIE Chromaticity Diagram**

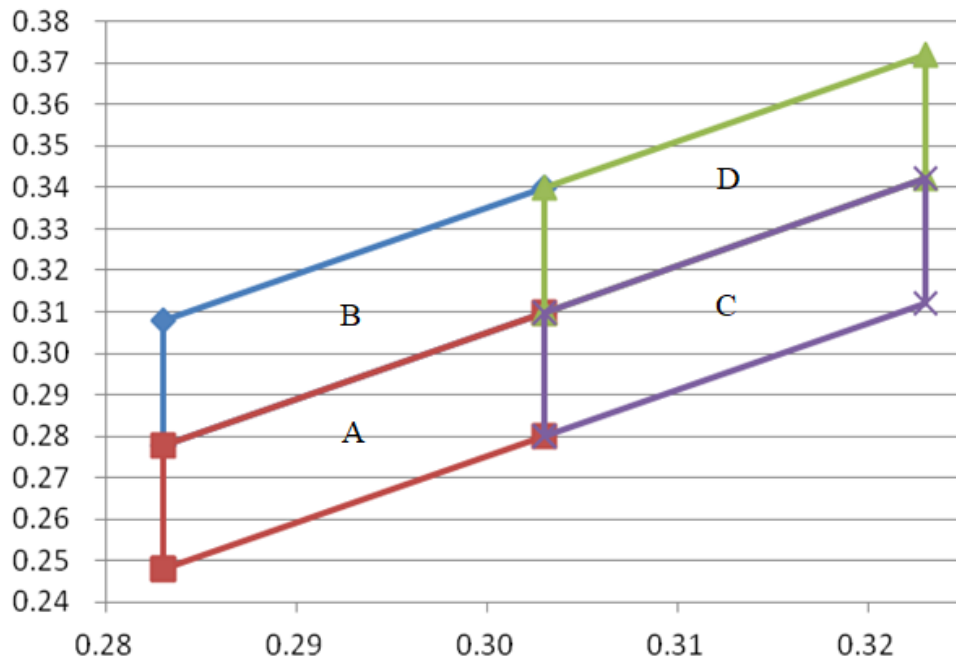


Rank	Chromaticity coordinates				
		X	Y	X	Y
A	X	0.278	0.273	0.298	0.298
	Y	0.243	0.275	0.305	0.275
B	X	0.278	0.303	0.298	0.298
	Y	0.273	0.318	0.335	0.305
C	X	0.298	0.305	0.318	0.318
	Y	0.275	0.337	0.337	0.307
D	X	0.298	0.335	0.318	0.318
	Y	0.305	0.367	0.367	0.337

## Characteristic Curves

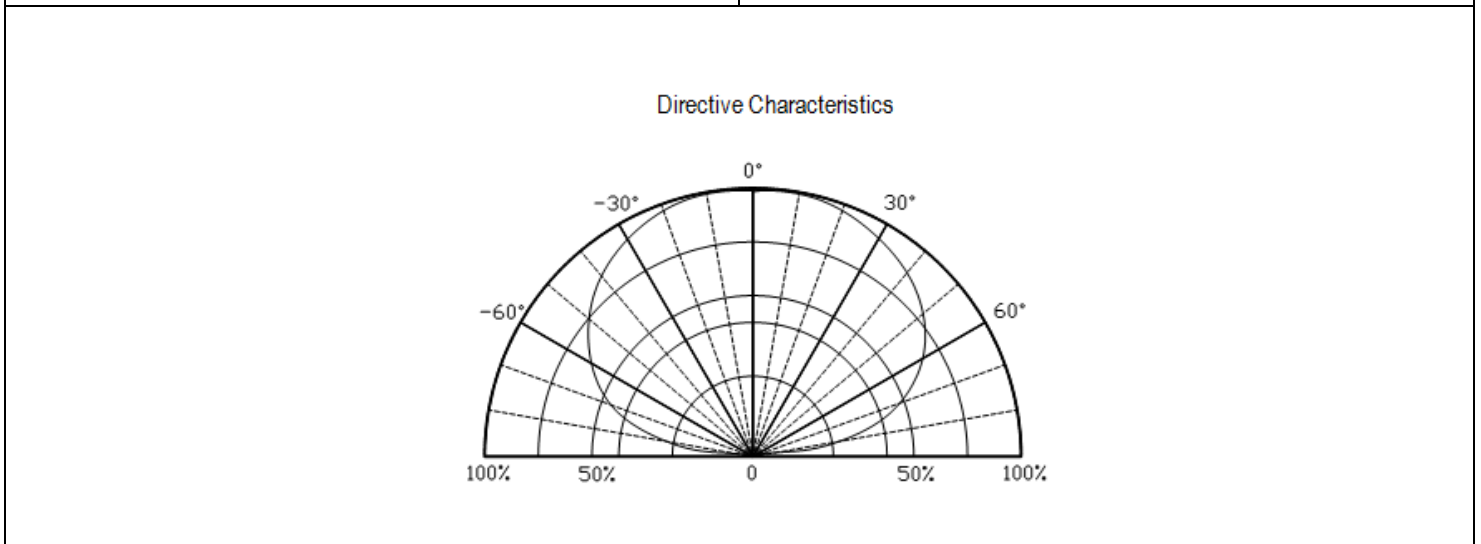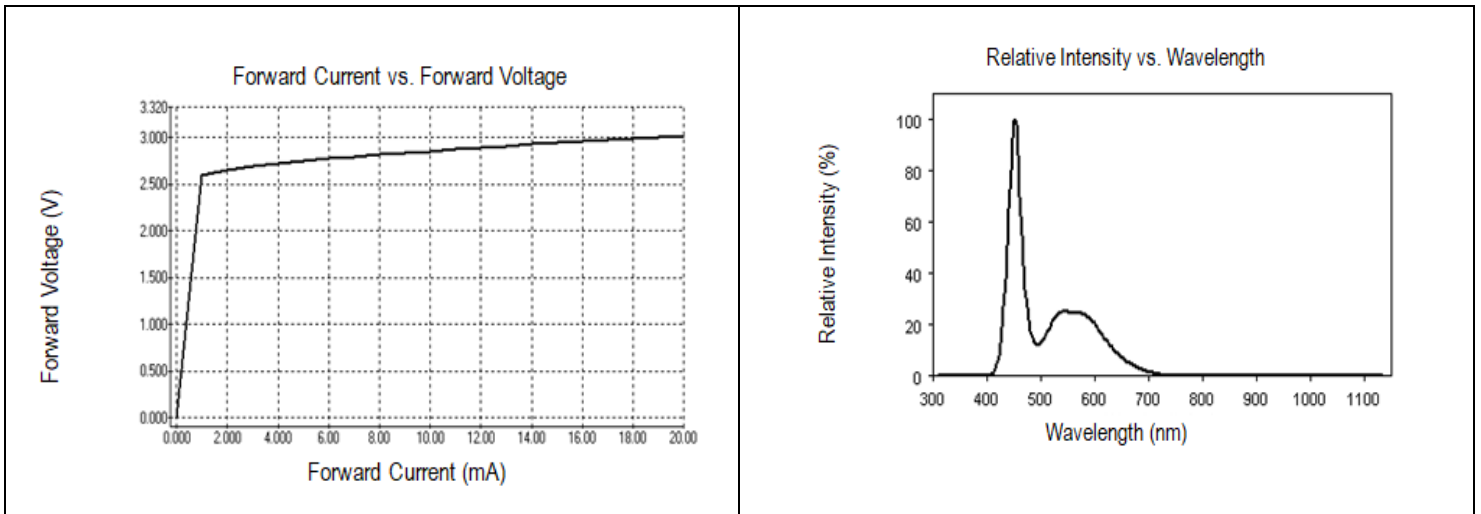


## Solder Profile & Footprint

-The recommended soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

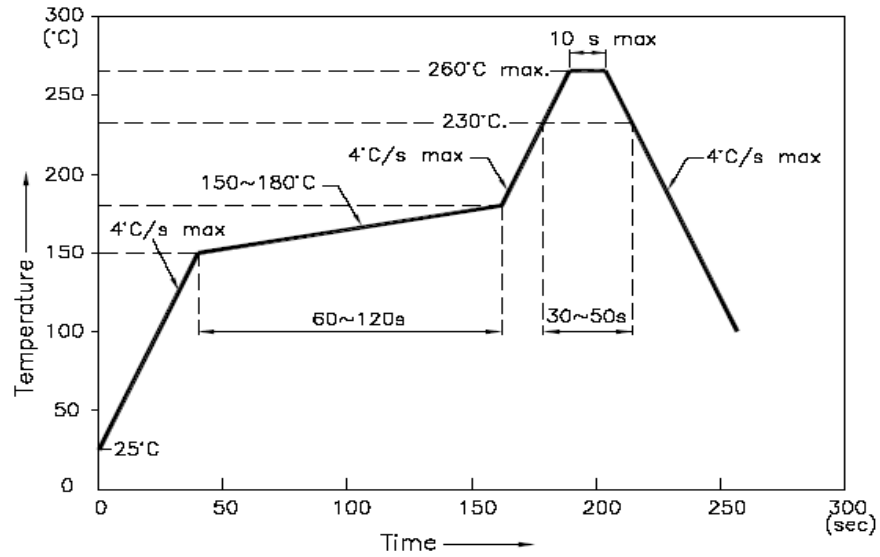

### Recommended Pad Layout

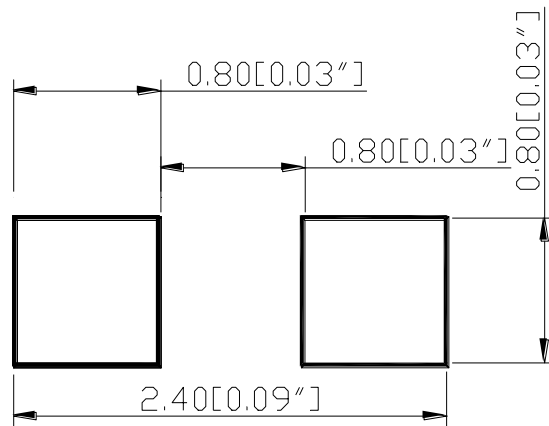


Units: mm

Tolerance: ±0.1mm


## Packing

### Reel Dimension:




Unit: mm

### Tape Dimension:

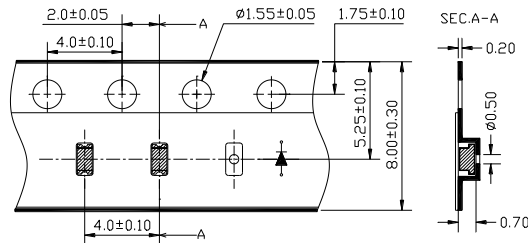


Unit: mm

### Arrangement of Tape:

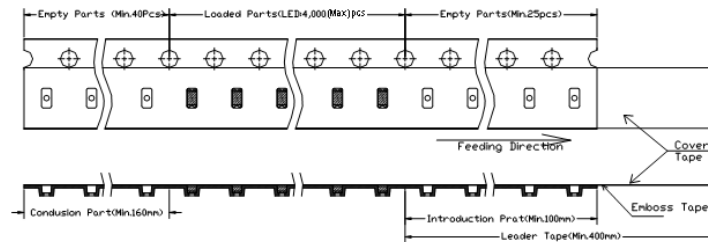

### Packaging Specifications:

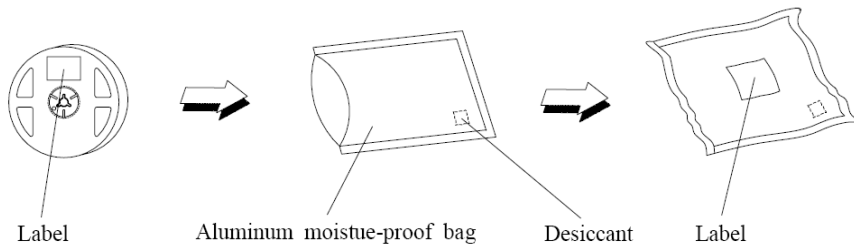

Product: QBLP601-IW5-2897	Date: October 06, 2021	Page 8 of 10
	Version# 1.0	





---

### Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per reel
QBLP601-IW5-2897	QBLP601-IW5-2897	Iv=190mcd typ. @ I <sub>f</sub> =5mA / CIE Coordinate: (X=0. 0.3002, Y=0.305) typ.	4,000 units

---

## Revision History

Description:	Revision #	Revision Date
New Release of QBLP601-IW5-2897	V1.0	10/06/2021



## Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.